


TECHNICAL SPECIFICATION




HU
O2

REAR ELEVATION

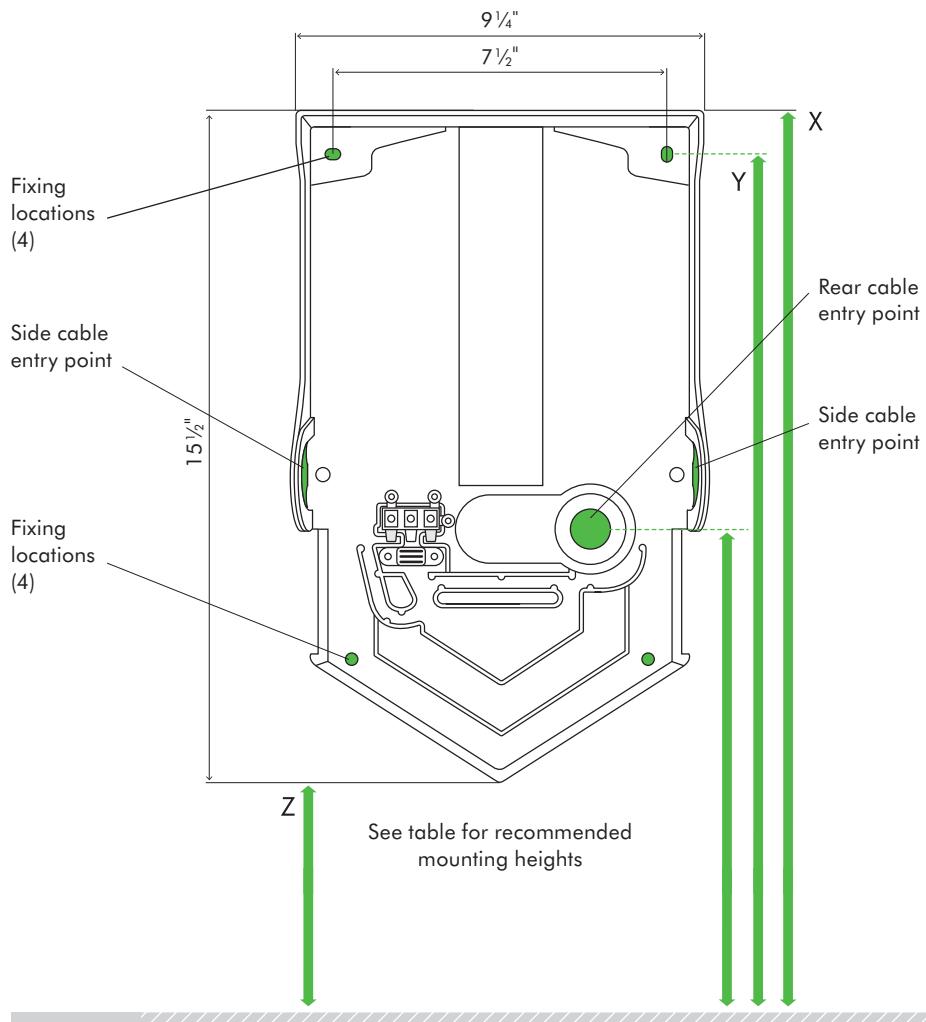

SIDE ELEVATION

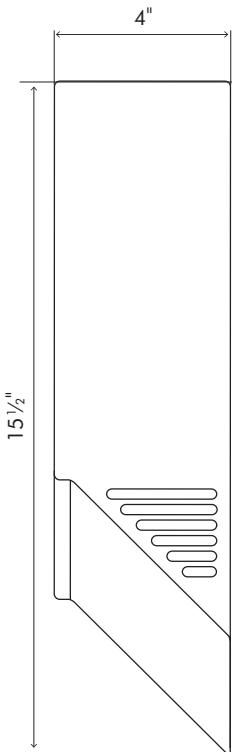

All dimensions shown in inches (+/- 3/16 inch)

FLOOR

Recommended installation heights from floor

Male	X 52 1/8"	Y 51 3/16"	Z 36 5/8"
Female	X 50 3/4"	Y 49 13/16"	Z 35 1/4"
Child or disabled	X 42 5/16"	Y 41 3/8"	Z 26 13/16"
Child 5-8	X 37 1/2"	Y 36 7/16"	Z 22"
Child 8-11	X 41 7/16"	Y 40 1/2"	Z 25 15/16"
Child 11-14	X 44 5/8"	Y 43 5/8"	Z 29"

Machine dimensions

Height 15 1/2" Width 9 7/32" Depth 4"

Minimum clearance

81 1/16" clearance either side and 13/16" above machine.

Cable entry point from floor

Male	42 7/8"
Female	41 1/2"
Child or disabled	33 3/16"
Child 5-8	28 1/4"
Child 8-11	32 3/16"
Child 11-14	35 1/4"



dyson airblade V

HU
O2

Electrical

Input voltage/Frequency: 120-127 V 50&60 Hz

Standby power consumption: Less than 0.5 W

Motor specification: 1,000 W digital brushless motor

Heater type: None

Construction

Fascia: Polycarbonate

Antibacterial coating type:

HU02 (Sprayed Nickel) contains antibacterial additive in paint.

HU02 (White) contains antibacterial moulded additive.

Can help prevent the growth of bacteria.

Back plate mounting bracket: ABS/PBT Plastic

Exterior screw type: Anti-tamper 4 mm Pin-Hex

Water ingress protection to IP24

Filter

HEPA filter (Glass fibre and fleece prelayer)

99.97% of particles captured to the size of 0.3 microns

Operation

Touch free capacitive sensor activation

Hand dry time measurement: 12 seconds

(Measurement based on NSF Protocol P.335)

Sound power level: 79 dB (A)

Sound pressure level @ 2 m: 63 dB(A)¹

Operation lock-out period: 30 seconds

Airspeed at aperture: 690 km/h / 430 mph

Maximum altitude: 2,000 metres / 6,561 ft.

Operating temperature range: 0°C-40°C / 32°F-104°F

Logistics

Single unit order code:

Sprayed Nickel: 307174-01, White: 307173-01

Unit barcode:

Sprayed Nickel: 885609009933, White: 885609009896

Net weight: 2.9 kg / 6.17 lbs

Packaged weight: 4.0 kg / 8.81 lbs

Packaged dimensions:

(H)145 x (W)455 x (D)274 mm / (H)5³/₄" x (W)17⁷/₈" x (D)10³/₄"

Standard warranty

5 year warranty

¹Sound pressure measured at 2 m distance, in a semi-anechoic chamber.



Product range



The Carbon label is a trademark of the Carbon Trust.
The NSF logo is the registered trademark of NSF International.
Quiet Mark is a registered trademark of the Noise Abatement Society.